



ASTRA F.R. dis. CLARISSA



AST/CLA



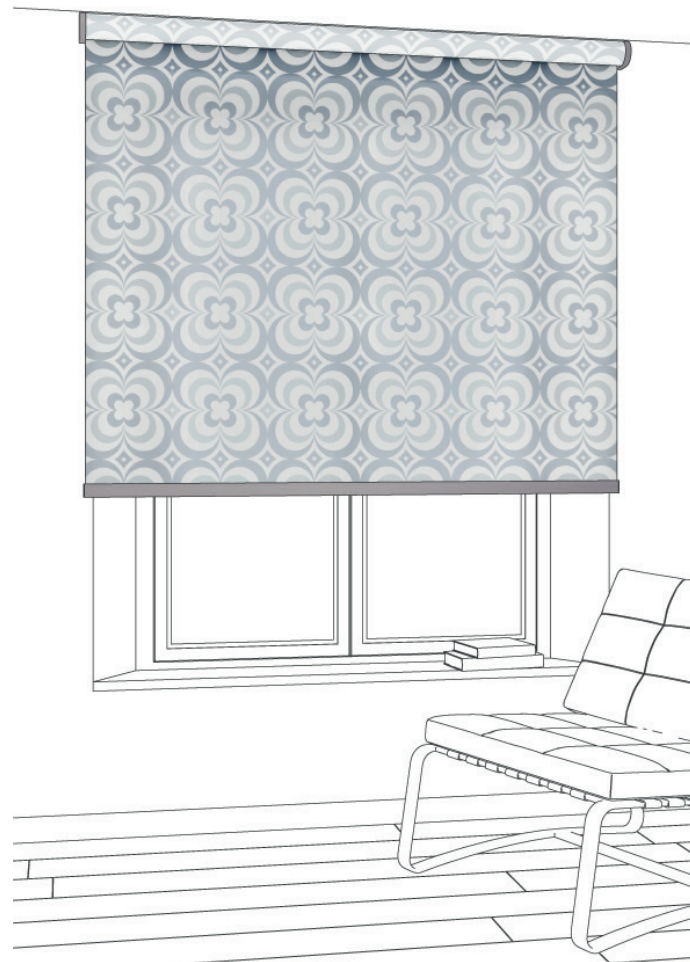

| | | | | | | | | | | | | | | | | | | |
|---------|-----|------|-----|--------------------|---|-----------------|-----------------|-----|----|----|-------|----|----|---|----|----|------|----|
| AST/CLA | 230 | 0,35 | 170 | 100% PL Trevira CS | Classe1 (I), M1(F), B1(D), BS (GB), EN 13773 Class1(EU) | Low Transparent | OEKO-TEX, REACH | 6/7 | No | No | 15.00 | 43 | 50 | 7 | 45 | 54 | 0,41 | 90 |
|---------|-----|------|-----|--------------------|---|-----------------|-----------------|-----|----|----|-------|----|----|---|----|----|------|----|

All coefficients have a possible tolerance of +/- 5%
 Attention: colour shades may vary slightly from one dye lot to another

| | | | | | |
|-----------|-----------------|----------------------|-----------------------------------|--------------------|----------------------|
| Width | Composition | Health certification | IMO - Fabrics for marine industry | Solar reflection | Light absorption |
| Thickness | Flame retardant | Colour fastness | Openess factor | Solar absorption | G tot Type C - GLASS |
| Weight | Transparency | Sealable | Solar transmission | Light transmission | UV reduction |
| | | | | | Sound absorption |
| | | | | | Warp - Weft N5 cm |

MAINTENANCE REMOVE THE BLIND FROM THE SYSTEM, ROLL NO FOLDING. SOAK IN WARM WATER MAX 30° WITH DELICATE DETERGENT (E.G. IN A BATH TUB). MARKS AND DUST CAN BE REMOVED WITH A SOFT BRUSH. RINSE CLOTH THOUROUGHLY WITH WATER AND DRAIN. HANG THE FABRIC WHILE DAMP AND LEAVE TO DRY. CAN BE IRONED AT SETTING 1.