

Miglio plissè 20mm



TP/3790/01



TP/3790/02




TP/3790/03



TP/3790/04



TP/3790/05




TP/3790/06



TP/3790/07




TP/3790/08





Ref.	cm	mm	g/m ²	Composition	Health certification	IMO - Fabrics for marine industry	Solar reflection	Light absorption	Sound absorption	Thickness	Flame retardant	Colour fastness	Openess factor	Solar absorption	G tot Type C - GLASS	Warp - Weft N5 cm	Weight	Transparency	Sealable	Solar transmission	Light transmission	UV reduction	G TOT INT
TP/3790/01	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	44	51	5	43	56	0,41								
TP/3790/02	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	42	51	7	41	54	0,41								
TP/3790/03	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	26	31	43	40	32	0,47								
TP/3790/04	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	33	30	37	35	29	0,48								
TP/3790/05	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	31	34	35	33	35	0,46								
TP/3790/06	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	29	26	45	27	26	0,49								
TP/3790/07	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	22	13	65	19	12	0,53								
TP/3790/08	230	0,45	220	100% PL	Low Transparent	OEKO-TEX, REACH	5/6	No	No	14	11	75	13	10	0,53								

All coefficients have a possible tolerance of +/- 5%
 Attention: colour shades may vary slightly from one dye lot to another

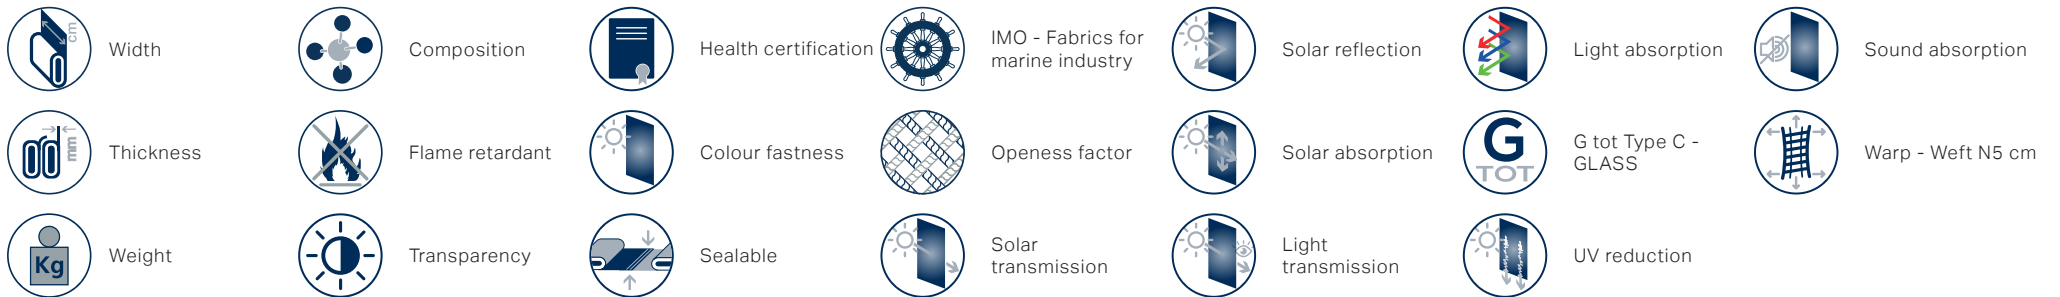

MAINTENANCE DO NOT USE WATER: INTERVENE USING DRY METHODS FOR REMOVING DUST DEPOSITS.