



Suite F R




SU/01




SU/02



SU/03




SU/04





Ref.	cm	mm	g/m ²	Composition	Flame retardant	Health certification	IMO - Fabrics for marine industry	Solar reflection	Solar absorption	Light absorption	Sound absorption	Colour fastness	Openess factor	Solar absorption	G tot Type C - GLASS	Warp - Weft N5 cm	Transparency	Sealable	Solar transmission	Light transmission	UV reduction
SU/01	300	0,40	303	100% PL F.R.	Classe 1 (I)	Blackout	No	5	No	No	0	3	97	3	0,56	100					
SU/02	300	0,40	303	100% PL F.R.	Classe 1 (I)	Blackout	No	5	No	No	0	4	96	4	0,56	100					
SU/03	300	0,40	303	100% PL F.R.	Classe 1 (I)	Blackout	No	5	No	No	0	4	96	3	0,56	100					
SU/04	300	0,40	303	100% PL F.R.	Classe 1 (I)	Blackout	No	5	No	No	0	4	96	3	0,56	100					

All coefficients have a possible tolerance of +/- 5%
 Attention: colour shades may vary slightly from one dye lot to another

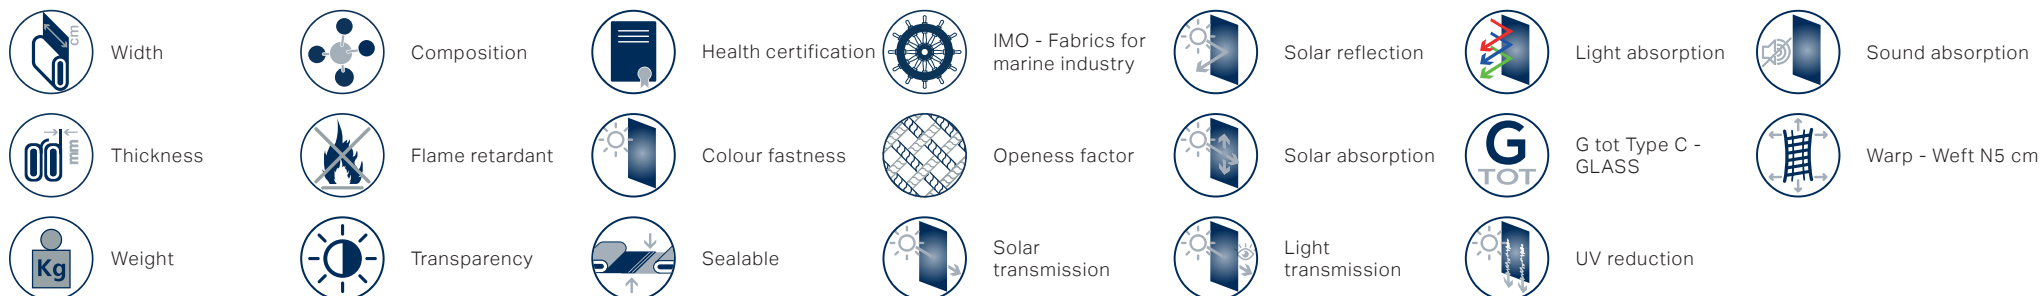

MAINTENANCE HANDLE THE FABRIC WITH CARE, USING CLEAN DRY HANDS. DO NOT USE SOLVENTS OR ANY ABRASIVE SUBSTANCES THAT MAY DAMAGE THE FABRIC. WHEN CLEANING WINDOWS THE BLIND MUST BE RAISED TO AVOID ANY DIRECT OR INDIRECT SPRAY OF CLEANING PRODUCTS. REMOVE THE DUST WITH A VACUUM CLEANER OR USING COMPRESSED AIR, AVOID PULLING OR STRETCHING FABRIC. ONLY FOR PVC COATED PRODUCTS, CLEAN WITH A DAMP CLOTH OR A SPONGE DIPPED IN SOAPY WATER IF NECESSARY. RINSE WITH CLEAN WATER. DO NOT RUB. LEAVE THE BLIND DOWN UNTIL COMPLETELY DRY.