

# SVELO



**SVE/01**



**SVE/02**



**SVE/03**




**SVE/04**





Ref.	cm	mm	g/m <sup>2</sup>	Composition	Health certification	IMO - Fabrics for marine industry	Solar reflection	Solar absorption	Light transmission	UV reduction	Light absorption	Sound absorption	G tot Type C - GLASS	Warp - Weft N5 cm		
SVE/01	250	0,37	94	100% PL	Transparent	OEKO-TEX	6/7	No	No	36	57	7	36	61	0,39	90
SVE/02	250	0,37	94	100% PL	Transparent	OEKO-TEX	6	No	No	35	49	16	28	45	0,42	85
SVE/03	250	0,37	94	100% PL	Transparent	OEKO-TEX	5	No	No	22	32	46	4	8	0,47	96
SVE/04	250	0,37	94	100% PL	Transparent	OEKO-TEX	5	No	No	26	40	34	10	24	0,44	91

All coefficients have a possible tolerance of +/- 5%  
 Attention: colour shades may vary slightly from one dye lot to another

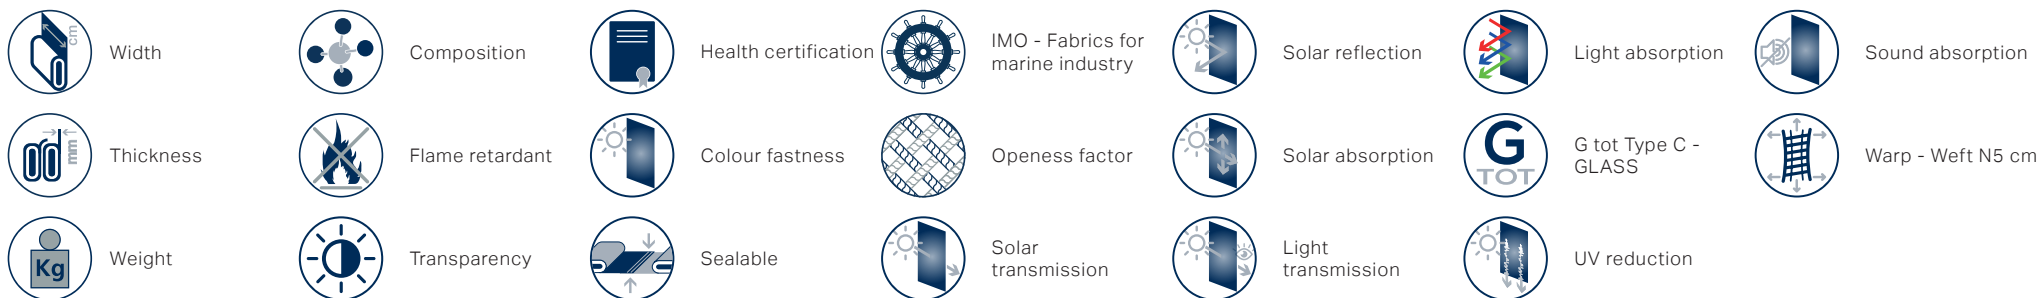

**MAINTENANCE** HANDLE THE FABRIC WITH CARE, USING CLEAN DRY HANDS. DO NOT USE SOLVENTS OR ANY ABRASIVE SUBSTANCES THAT MAY DAMAGE THE FABRIC. WHEN CLEANING WINDOWS THE BLIND MUST BE RAISED TO AVOID ANY DIRECT OR INDIRECT SPRAY OF CLEANING PRODUCTS. REMOVE THE DUST WITH A VACUUM CLEANER OR USING COMPRESSED AIR, AVOID PULLING OR STRETCHING FABRIC. ONLY FOR PVC COATED PRODUCTS, CLEAN WITH A DAMP CLOTH OR A SPONGE DIPPED IN SOAPY WATER IF NECESSARY. RINSE WITH CLEAN WATER. DO NOT RUB. LEAVE THE BLIND DOWN UNTIL COMPLETELY DRY.