


Oasi F.R.




OA/531



OA/532


























OA/533




OA/534



Name	Cat.	Ref.																									
Reference Standard							UNI EN ISO 2286-2	UNI EN ISO 2286-3	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	UNI EN 14501	EN ISO 11654	UNI EN ISO 1421	UNI EN ISO 1421	UNI EN ISO 105 B02		

Oasi F.R.	OA	OA/531	38% PL 62% PVC	Classe 1 (I), B1 (D), NFPA 701 (US), BS (GB)	GREENGUARD GOLD	OEKO-TEX	300	350	0,52	5		24	64	12	21	70	0,32						95		130	130	8		heat		
Oasi F.R.	OA	OA/532	38% PL 62% PVC				300	350	0,52	5		22	56	22	18	60	0,37								95		130	130	8		heat
Oasi F.R.	OA	OA/533	38% PL 62% PVC				300	350	0,52	5		19	50	31	16	53	0,39								95		130	130	8		heat
Oasi F.R.	OA	OA/534	38% PL 62% PVC				300	350	0,52	5		20	40	40	15	42	0,44								95		130	130	8		heat

All coefficients have a possible tolerance of +/- 5%
Attention: colour shades may vary slightly from one dye lot to another

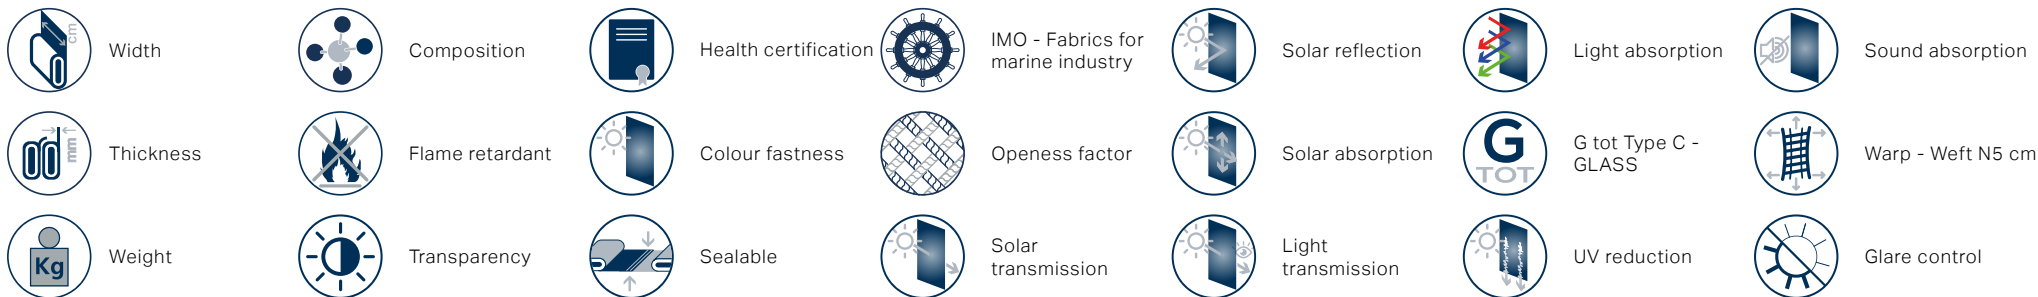

MAINTENANCE HANDLE THE FABRIC WITH CARE, USING CLEAN DRY HANDS. DO NOT USE SOLVENTS OR ANY ABRASIVE SUBSTANCES THAT MAY DAMAGE THE FABRIC. WHEN CLEANING WINDOWS THE BLIND MUST BE RAISED TO AVOID ANY DIRECT OR INDIRECT SPRAY OF CLEANING PRODUCTS. REMOVE THE DUST WITH A VACUUM CLEANER OR USING COMPRESSED AIR, AVOID PULLING OR STRETCHING FABRIC. ONLY FOR PVC COATED PRODUCTS, CLEAN WITH A DAMP CLOTH OR A SPONGE DIPPED IN SOAPY WATER IF NECESSARY. RINSE WITH CLEAN WATER. DO NOT RUB. LEAVE THE BLIND DOWN UNTIL COMPLETELY DRY.