










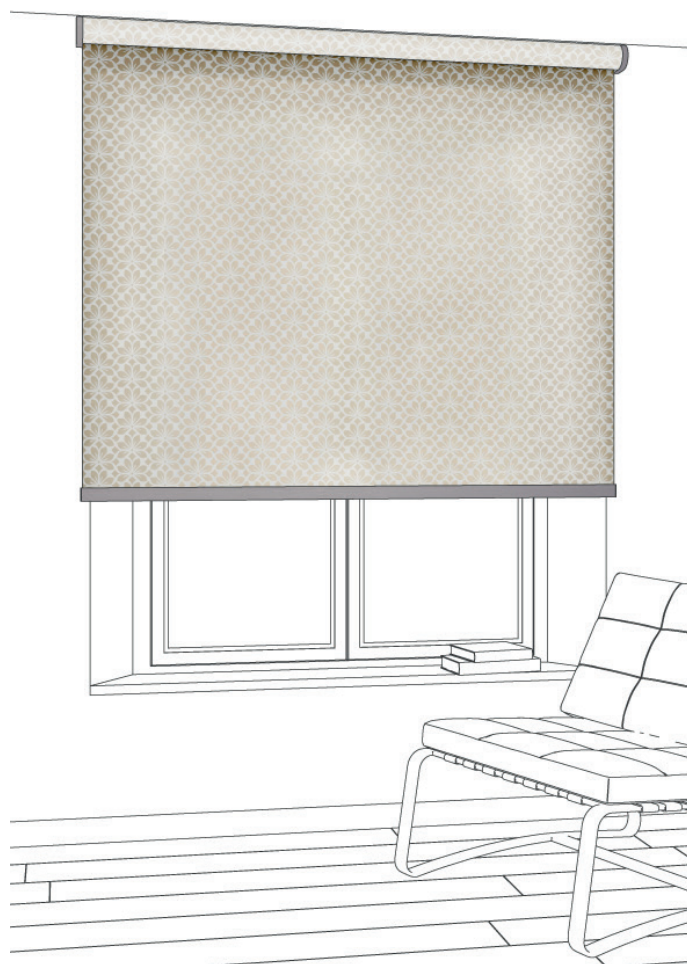









ASTRA F.R. dis. FRIDA























AST/FRI



Ref.	 cm	 mm	 g/m ²															
AST/FRI	230	0,35	170	100% PL Trevira CS	Classe1 (I), M1(F), B1(D), BS (GB), EN 13773 Class1(EU)	Low Transparent	OEKO-TEX, REACH	6/7	No	No	15.00	43	50	7	45	54	0,41	90

All coefficients have a possible tolerance of +/- 5%
Attention: colour shades may vary slightly from one dye lot to another

	Width		Composition		Health certification		IMO - Fabrics for marine industry		Solar reflection		Light absorption		Sound absorption
	Thickness		Flame retardant		Colour fastness		Openess factor		Solar absorption		G tot Type C - GLASS		Warp - Weft N5 cm
	Weight		Transparency		Sealable		Solar transmission		Light transmission		UV reduction		

MAINTENANCE REMOVE THE BLIND FROM THE SYSTEM, ROLL NO FOLDING. SOAK IN WARM WATER MAX 30° WITH DELICATE DETERGENT (E.G. IN A BATH TUB). MARKS AND DUST CAN BE REMOVED WITH A SOFT BRUSH. RINSE CLOTH THOUROUGHLY WITH WATER AND DRAIN. HANG THE FABRIC WHILE DAMP AND LEAVE TO DRY. CAN BE IRONED AT SETTING 1.